




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1113615	10	25/64	21	0,83	18	270	180	2700	0,37	0,25	120	400
1236580	13	1/2	25	0,99	18	270	180	2700	0,50	0,34	120	400
1209990	16	5/8	28	1,10	18	270	180	2700	0,58	0,39	120	400
1180070	19	3/4	31	1,22	18	270	180	2700	0,66	0,44	120	400
1186280	25	1	37	1,46	18	270	180	2700	0,88	0,59	120	400
1188437	32	1-1/4	46,5	1,83	18	270	180	2700	1,29	0,87	120	400
1221566	51	2	66,5	2,62	18	270	180	2700	2,28	1,53	60	200
1147579	63,5	2-1/2	81,5	3,21	18	270	180	2700	3,33	2,24	60	200
1210610	76	3	96,5	3,80	18	270	180	2700	4,34	2,92	60	200

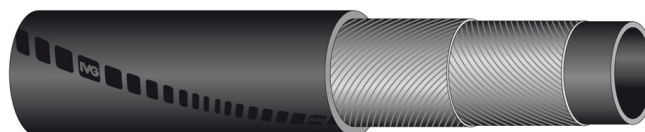

EN

Steam hose for 210°C

Application: steel cord hose for saturated steam at a maximum working pressure 18 bar (261psi), used in the chemical industry, petrochemical and industrial applications in general. Not recommended for steam cleaner. The hose can be used for peaks of superheated steam at 230°C and at 18 bar. Attention: the use of superheated steam reduces the hose life. For longer life drain after use.

Temperature: from -40°C (-40°F) to +210°C (+410°F).

Construction

Tube: black, smooth, EPDM rubber, resistant to saturated steam.

Reinforcement: inserts of steel wire.

Cover: black, pin pricked, smooth (wrapped finish), EPDM rubber with excellent resistance to high temperatures, weathering, abrasion and ageing.

Branding: embossed marking "IVG Steam Victoria...".

Also available upon request: 1. Victoria with tube in accordance to FDA, W.P. 6 bar 2. Different diameters 3. Red cover.

CN

210° C 蒸汽管

应用范围: 钢丝加强层蒸汽管，用于输送最大工作压力为18 bar (261psi) 的饱和蒸汽。用于化工，石化以及一般工业应用。不建议用于蒸汽清洗机。该管可在18 bar 工作压力时短时间耐230° C

的过热蒸汽。注意：用于过热蒸汽后会缩短管子使用寿命。为延长寿命请后将管内的水排净

温度范围: -40° C (-40° F) 到 +210° C (+410° F)

软管结构

内层: 黑色，光滑，EPDM 橡胶，耐饱和蒸汽

加强层: 钢线加强层

外层: 黑色，光滑(表面布纹)，EPDM 橡胶，极好的耐高温、耐气候和耐老化性，表面采用针孔技术，能防止管子内部脱层引起爆裂

商标: 连续凸起标记 "IVG - Steam Victoria..."

可选择项: 1. 食品级内管符合FDA，工作压力为6 bar 2. 不同口径 3. 红色外层