


code	inside diameter		weight nominal		bending radius		vacuum	length max	
	mm	inch	kg/m	lbs/ft	mm	inch		m	ft
1095838	40	1-37/64	0,43	0,29	115	4,5	0,3	60	200
1075250	51	2	0,54	0,36	145	5,7	0,3	60	200
1121375	60	2-3/8	0,63	0,42	180	7,1	0,3	60	200
1100602	70	2-3/4	0,73	0,49	220	8,7	0,2	60	200
1095854	76	3	0,79	0,53	240	9,5	0,2	60	200
1074601	102	4	1,05	0,71	345	13,6	0,2	12	40

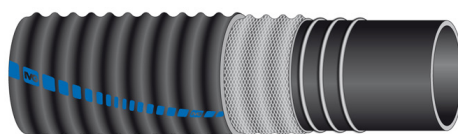

EN

Flexible ducting hose for ventilation

Application: hardwall corrugated hose, extremely light and flexible, suitable for ventilation and ducting.

Temperature: from -20°C (-4°F) to +70°C (+158°F).

Construction

Tube: black, smooth, SBR rubber.

Reinforcement: high strength synthetic cord and helix wire.

Cover: black, corrugated (wrapped finish), SBR rubber.

Branding: continuous blue stripe "IVG Vent (Family Logo)...".

CN

柔性通风管

应用范围: 波浪型硬壁软管，极轻，柔性好，适合通风和管道

温度范围: -20° C (-4° F) 到 +70° C (+158° F)

软管结构

内层: 黑色，光滑，SBR 橡胶

加强层: 高强度合成线绳及环绕钢丝加强

外层: 黑色，波浪型（表面布纹），SBR 橡胶

商标: 连续蓝色条形标记 “IVG Vent (公司商标)...”