


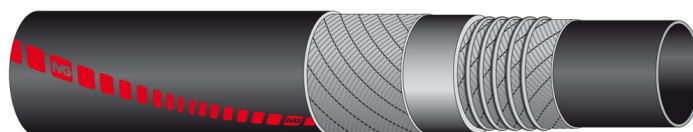

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1432559	19	3/4	28	1,10	10	150	30	450	0,51	0,34	95	3,7	0,9	120	400
1430157	25	1	34,5	1,36	10	150	30	450	0,67	0,45	125	4,9	0,9	120	400
1430629	32	1-1/4	41,5	1,64	8	120	24	360	0,83	0,56	160	6,3	0,9	120	400
1452410	38	1-1/2	48	1,89	8	120	24	360	1,02	0,69	185	7,3	0,9	120	400
1419510	40	1-37/64	50	1,97	8	120	24	360	1,07	0,72	195	7,7	0,9	120	400
1418998	45	1-49/64	55	2,17	6	90	18	270	1,19	0,80	198	7,8	0,9	120	400
1419293	51	2	61	2,40	6	90	18	270	1,33	0,89	200	7,9	0,9	120	400
1419676	60	2-3/8	71,5	2,82	5	75	15	225	2,08	1,39	315	12,4	0,9	120	400
1419668	76	3	88	3,47	5	75	15	225	2,88	1,93	380	15,0	0,9	120	400


EN

Hydraulic oil suction and delivery hose

Standards: SAE J517, type SAE 100 R4 for the rubber compounds.

Application: hardwall hose used for the suction and delivery of oil (except ester base) in hydraulic systems.

Temperature: from -40°C (-40°F) to +100°C (+212°F).

Construction

Tube: black, smooth, synthetic rubber, oil resistant.

Reinforcement: high strength synthetic cord plus steel helix wire.

Cover: black, smooth (wrapped finish), synthetic rubber, weathering resistant.

Branding: continuous red stripe "IVG OIL (family logo)...".

Also available upon request: 1. Different diameters.

CN

液压油吸排管

质量标准: 橡胶材料符合SAE J517, SAE 100 R4 型。

应用范围: 硬壁软管, 适用于液压系统中吸送和输送(除酯基油外)的液压油。

温度范围: -40° C (-40° F) 到 +100° C (+212° F)。

软管结构

内层: 黑色, 光滑, 耐油合成橡胶。

加强层: 高强度合成线绳螺旋钢丝加强。

外层: 黑色, 光滑(表面布纹)合成橡胶, 耐气候

商标: 连续红色条纹 "IVG OIL (公司商标)...".

可选择项: 1 不同口径

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, IVG Colbachini SpA cannot guarantee the proper functioning of the product for all situations. The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills.

IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it.

These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).