




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1384082	13	1/2	21	0,83	10	150	40	600	0,27	0,18	60	200
1341847	19	3/4	30	1,18	10	150	40	600	0,51	0,34	60	200
1337149	25	1	36,5	1,44	10	150	40	600	0,67	0,45	60	200
1357670	32	1-1/4	44	1,73	10	150	40	600	0,85	0,57	60	200
1357662	38	1-1/2	52	2,05	10	150	40	600	1,19	0,80	60	200
1337130	51	2	65	2,56	10	150	40	600	1,51	1,02	60	200
1357654	63,5	2-1/2	78,5	3,09	10	150	40	600	1,99	1,34	60	200
1337122	76	3	94	3,70	10	150	40	600	2,81	1,89	60	200
1357646	102	4	122	4,81	10	150	40	600	4,18	2,81	60	200

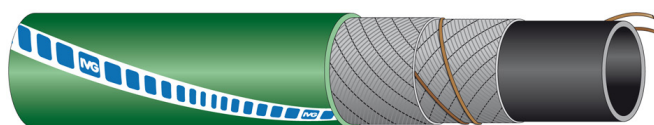

EN

Chemical and petroleum discharge, PE-X tube.

Application: softwall hose suitable for handling a wide range of chemicals, petroleum products and oils. Normally installed on tank trucks and discharge platforms in chemical and oil industries

Temperature: -40°C(-40°F)to+80°C(+176°F) depending on medium.

Construction

Tube: black, smooth, cross-linked polyethylene (PE-X). Chemical resistance according to IVG chemical resistance chart. For temperature exceeding 50°C contact IVG.

Reinforcement: high strength synthetic cord and antistatic copper wire.

Cover: green, smooth (wrapped finish), EPDM rubber resistant to chemicals, weathering and ozone.

Branding: continuous blue/white stripe "IVG Chem PE-X (family logo)..."

Also available upon request: 1.Supertop pe-x/bv with a non food quality white PE-X tube 2.Different diameters.

CN

多用途化学品输送管/PE-X

应用范围: 软壁胶管，广泛用于输送各种化学物质，石油产品及油类。多用于液体罐车，化工业及石油行业。

温度范围: -40° C(- 40° F) 到 +80° C (+176° F)，视介质而定。

软管结构

内层: 黑色，光滑，交联聚乙烯(PE-X)。化学品适应性请参照 IVG 化学物质表，当输送温度高于50°C请与我方联系

加强层: 高强度合成线绳及防静电铜丝。

外层: 绿色，光滑(表面布纹)，EPDM 橡胶。抗化学物质，抗老化和耐臭氧。

商标: 连续蓝白条纹 "IVG Chem PE-X (公司商标)..."。
可选择项: 1. 非食品级白色Supertop pe-x/bv 管2. 不同口径。