




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1471007	13	1/2	27	1,06	12	180	42	630	0,49	0,33	120	400
1479091	16	5/8	30	1,18	12	180	42	630	0,56	0,38	120	400
1472208	19	3/4	33	1,30	12	180	42	630	0,64	0,43	120	400
1471589	25	1	39	1,54	12	180	42	630	0,78	0,52	120	400
1470191	32	1-1/4	48	1,89	12	180	42	630	1,11	0,75	120	400
1471570	32	1-1/4	50	1,97	12	180	42	630	1,32	0,89	120	400
1472283	38	1-1/2	56,5	2,23	12	180	42	630	1,50	1,01	120	400
1471627	42	1-24/32	60,5	2,38	12	180	42	630	1,61	1,08	120	400
1471341	60	2-3/8	80	3,15	12	180	42	630	2,37	1,59	120	400

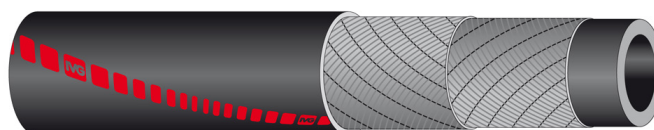

EN

Sand blast hose

Standards: abrasion loss of the tube according to ISO 4649: 40+/-5mm³. Exceeds the ISO 3861:2008.

Application: particularly abrasion resistant softwall hose, used for the delivery of highly abrasive media such as quartz sand, cast steel shot, corundum, glass. It is manufactured with antistatic rubber compound that prevents the risks of static electricity.

Temperature: from -40°C (-40°F) to +80°C (+176°F).

Construction

Tube: black, smooth, antistatic SBR/NR rubber, with special abrasion resistance that ensures a long service life.

Reinforcement: high strength synthetic cord.

Cover: black, smooth, (wrapped finish) antistatic synthetic rubber, abrasion resistant.

Branding: continuous red stripe "IVG Abr (family logo)Orinoco HP..".

Also available upon request: 1. Different diameters.

CN

质量标准: 磨耗标准符合ISO 4649:40+/-5mm³, 超越ISO3861:2008 标准

应用范围: 极耐磨的软壁软管, 用于喷砂作业, 用于输送沙子或铸钢 碎石及其他研磨粒料。防静电合成橡胶

温度范围: -40° C (-40° F) 到 +80° C (+176° F)

软管结构

内层: 黑色, 光滑, 抗静电耐磨的SBR/NR 橡胶, 有特殊的耐磨性 可确保较长的使用寿命

加强层: 高强度合成线绳

外层: 黑色, 光滑 (表面布纹), 抗静电, 合成橡胶, 耐磨

商标: 连续红色条形标记 "IVG Abr (公司商标)Orinoco HP..."

可选择项: 1. 不同口径