


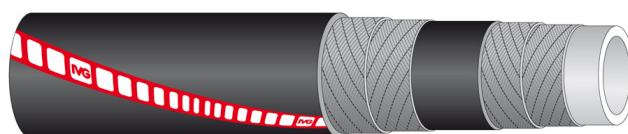

code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1375253	45	1-49/64	63	2,48	10	150	30	450	1,69	1,14	120	400
1365410	51	2	69	2,72	10	150	30	450	1,88	1,26	120	400
1378031	60	2-3/8	78	3,07	10	150	30	450	2,16	1,45	120	400
1381423	65	2-9/16	83	3,27	10	150	30	450	2,32	1,56	120	400
1348078	76	3	94	3,70	10	150	30	450	2,67	1,79	120	400


EN

Hot air blower hose from compressor to tank

Application: softwall hose designed for conveying hot, dry air from compressor to tank truck.

Temperature: from -40°C (-40°F) to +180°C (+356°F).

Construction

Tube: white, smooth, EPR rubber, heat resistant.

Reinforcement: high strength synthetic cord.

Cover: black, smooth (wrapped finish), EPDM rubber, weathering and ozone resistant.

Branding: continuous white/red stripe "IVG Truck (family logo)..."

Also available upon request: 1. Different diameters 2. Sahara 180°C with black tube and cover 3. Sahara bd 180°C with white rubber tube and blue cover.

RU

Рукав для подачи горячего воздуха от компрессора к цистерне.

Применение: напорный рукав, предназначенный для подачи сухого горячего воздуха от компрессора до цистерн грузовиков.

Температура: от -40° до +180°C.

Конструкция

Внутренний слой: белый, гладкий из теплостойкого синтетического каучука состава EPR.

Усиление: высокопрочный синтетический корд.

Покрытие: чёрное, гладкое (с отпечатком текстильного бандажа) из синтетического каучука EPDM, устойчивый к атмосферным воздействиям и озону.

Маркировка: красно/белая маркировочная лента "IVG Truck (логотип сферы применения)..."

В наличии по запросу: 1. Другие диаметры. 2. Sahara 180°C каучуковым внутренним слоем и покрытием чёрного цвета. 3. Sahara 180°C каучуковым внутренним слоем белого цвета и синим покрытием.

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, IVG Colbachini SpA cannot guarantee the proper functioning of the product for all situations. The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills.

IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it.

These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).