




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1419544	51	2	64	2,52	10	150	30	450	1,87	1,26	175	6,9	0,9	120	400
1418777	76	3	91	3,59	10	150	30	450	2,95	1,98	270	10,6	0,9	120	400
1418920	90	3-35/64	105,5	4,16	10	150	30	450	4,03	2,71	330	13,0	0,9	120	400
1419536	102	4	117,5	4,63	10	150	30	450	4,38	2,94	400	15,8	0,9	120	400

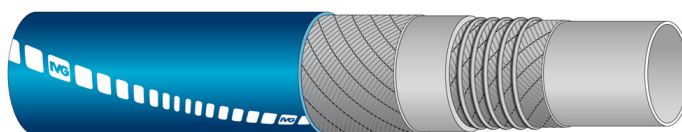

EN

Hot air blower hose from compressor to tank

Application: hardwall hose designed for conveying hot, dry air from compressor to tank truck. Ideal for use where a particularly reduced bending radius is required.

Temperature: it resists from -40°C to +200°C with peaks up to 240°C. High temp. can reduce the service life.

Construction

Tube: white, smooth, EPR rubber, heat resistant.

Reinforcement: high strength synthetic cord and steel helix wire.

Cover: blue, smooth (wrapped finish), EPDM rubber, weathering and ozone resistant.

Branding: continuous white stripe "IVG Truck (Family logo)...".

Also available upon request: 1. Different diameters 2. Sahara LL 240°C with black tube and cover 3. Sahara LL bn 240°C with white rubber tube and black cover.

CN

热空气吸排管240° C

应用范围: 硬壁软管，用于从压缩机传送干燥的热空气到罐车，特别 是用于要求较小弯曲半径的工矿

温度范围: 耐受温度范围-40° C 到+200° C，可耐受峰值温度高达 240° C。高温会缩短管道的使用寿命。

软管结构

内层: 白色，光滑，EPR 橡胶，耐热

加强层: 高强度合成线及螺旋钢丝加强

外层: 蓝色，光滑（表面布纹）EPDM 橡胶，耐臭氧，耐气候

商标: 连续白色商标带 “IVG Truck (公司商标)...”

可选择项: 1. 不同口径 2. Sahara LL 240° C，黑色内外层

3. Sahara LL bn 240° C，白色内胶，黑色外层