




| code | inside diameter | | outside diameter | | working pressure | | burst pressure | | weight nominal | | length max | |
|---------|-----------------|---------|------------------|------|------------------|-----|----------------|-----|----------------|--------|------------|-----|
| | mm | inch | mm | inch | bar | psi | bar | psi | kg/m | lbs/ft | m | ft |
| 1349287 | 13 | 1/2 | 20 | 0,79 | 10 | 150 | 30 | 450 | 0,24 | 0,16 | 120 | 400 |
| 1344269 | 19 | 3/4 | 27 | 1,06 | 10 | 150 | 30 | 450 | 0,36 | 0,24 | 120 | 400 |
| 1008463 | 25 | 1 | 35 | 1,38 | 10 | 150 | 30 | 450 | 0,62 | 0,42 | 120 | 400 |
| 1357930 | 32 | 1-1/4 | 42 | 1,65 | 10 | 150 | 30 | 450 | 0,76 | 0,51 | 120 | 400 |
| 1247808 | 38 | 1-1/2 | 48 | 1,89 | 10 | 150 | 30 | 450 | 0,82 | 0,55 | 120 | 400 |
| 1370154 | 51 | 2 | 61 | 2,40 | 10 | 150 | 30 | 450 | 1,06 | 0,71 | 120 | 400 |
| 1295497 | 63,5 | 2-1/2 | 74 | 2,92 | 10 | 150 | 30 | 450 | 1,39 | 0,93 | 120 | 400 |
| 1282832 | 76 | 3 | 89 | 3,51 | 10 | 150 | 30 | 450 | 2,03 | 1,36 | 120 | 400 |
| 1363344 | 90 | 3-35/64 | 105 | 4,14 | 10 | 150 | 30 | 450 | 2,72 | 1,83 | 120 | 400 |
| 1358006 | 102 | 4 | 115,5 | 4,55 | 10 | 150 | 30 | 450 | 2,80 | 1,88 | 120 | 400 |
| 1292242 | 152 | 6 | 172 | 6,78 | 10 | 150 | 30 | 450 | 6,05 | 4,06 | 120 | 400 |

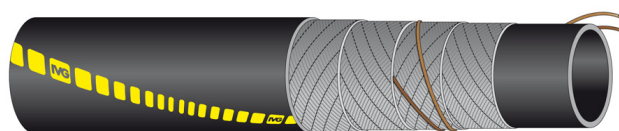

EN

Fuel and oil delivery hose

Application: softwall hose used for the delivery of petroleum products with aromatic content up to 30%.

Temperature: from -20°C (-4°F) to +70°C (+158°F).

Construction

Tube: black, smooth, NBR rubber.

Reinforcement: high strength synthetic cord plus antistatic copper wire.

Cover: black, smooth (wrapped finish), synthetic rubber, weathering and oil resistant.

Branding: continuous yellow stripe "IVG (family logo)...".

Also available upon request: 1.Different diameters 2.Different working pressures 3.Australia EN 1761:1999 4.Australia Reel hose (50% aromatic content) 5.Australia Super 50% aromatic content.

CN

家用液化气管

质量标准: UNI 7140:1993.

应用范围: 柔性软管, 用于家庭液化气管线(白色外胶) 或者连接液化气瓶(蓝色外胶), 符合UNI 7140:1993 标准。

温度范围: -10° C (+14° F) 到 +80° C (+176° F).

软管结构

内层: 黑色, 无缝橡胶, 适于家用燃气

加强层: 高强度合成纤维编织

外层: 蓝或白色, 无缝橡胶, 耐磨, 耐臭氧, 耐老化。

商标: DOMESTIC BLUE GAS - UNI CIG 7140:1993 TIPO A - 8

MM - TO BE CHANGED WITHIN ... DOMESTIC WHITE GAS - UNI

CIG 7140:1993 TIPO A - 13 MM - TO BE CHANGED WITHIN ...



SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, IVG Colbachini SpA cannot guarantee the proper functioning of the product for all situations. The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills.

IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it.

These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).