


code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1471961	6	17/72	14	0,55	3,5	53	14	210	0,21	0,14	45	1,8	60	200
1471970	8	5/16	16	0,63	3,5	53	14	210	0,25	0,17	55	2,2	60	200
1471988	10	25/64	19	0,75	3,5	53	14	210	0,34	0,23	65	2,6	60	200
1471996	12	15/32	21	0,83	2,5	38	10	150	0,41	0,28	75	3,0	40	131
1472003	13	1/2	22	0,87	2,5	38	10	150	0,41	0,28	80	3,2	40	131
1472020	15	19/32	24	0,95	2,5	38	10	150	0,46	0,31	90	3,5	40	131
1472038	16	5/8	25	0,99	2,5	38	10	150	0,48	0,32	100	3,9	40	131
1472046	18	23/32	27	1,06	2,5	38	10	150	0,53	0,36	105	4,1	40	131
1472054	19	3/4	28	1,10	2,5	38	10	150	0,55	0,37	110	4,3	40	131

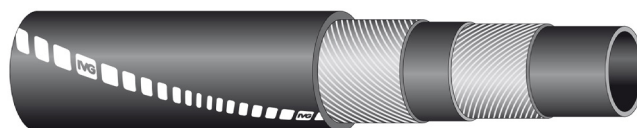

EN

Extruded petrol and diesel oil hose

Standards: European Directive 2013/53/UE, ISO 7840:21 A1 E10/B10 compatible, RINA approved N.DIP189423VE/003. SAE J 1527:22 USCG type A1.

Application: hose suitable for conveying petrol and diesel oil at low pressure, fire resistant for small craft (up to 24 m) with permanently installed inboard engines.

Temperature: from -20 °C (-4 °F) to +100 °C (+212 °F).

Construction

Tube: black, seamless synthetic rubber compound, resistant to oils and fuels, whit aromatic content up to 50%.

Reinforcement: high strength synthetic fabrics.

Cover: black, fire resistant, seamless synthetic rubber compound, resistant to ageing, greases, weather and heat.

Branding: IVG POSEIDON/EXTR -anno-id-ISO 7840:21-A1 E10/B10 COMPATIBLE - CE N.DIP189423VE/003 RINA - SAEJ 1527:22 - USCG TYPE A1 - NMMA Type accepted.

CN

光面游艇燃油输送管

质量标准: 欧洲规范2013/53/UE, ISO 7840:21 A1 E10/B10 兼容, RINA认证 N.DIP189423VE/003. SAE J 1527.22. 美国USCG A1 类R1 型。

应用范围: 光面软壁胶管, 适于输送低压的汽油和柴油, 防火外胶, 适用于装有永久性引擎的24 米以下小型船只。

温度范围: -20° C (-4° F) 到 +100° C (+212° F)。

软管结构

内层: 黑色, 无缝的合成橡胶, 耐芳烃50%的油和燃料。

加强层: 高强度合成纤维织物。

外层: 黑色, 防火, 无缝的合成橡胶, 耐老化, 润滑油, 气候和耐热。

商标: IVG BOAT POSEIDON/EXTR - 年份-内径-ISO 7840:21-A1 E10/B10 compatible - CE N.DIP189423VE/003 RINA - SAE J 1527:22-USCG Type A1- NMMA Type accepted.