


code	inside diameter		outside diameter		burst pressure		weight nominal		bending radius		length max	
	mm	inch	mm	inch	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1440764	20	25/32	29	1,14	2,5	38	0,51	0,34	80	3,2	120	400
1439030	25	1	34	1,34	2,5	38	0,63	0,42	100	3,9	120	400
1439049	30	1-3/16	39	1,54	2,5	38	0,73	0,49	120	4,7	120	400
1442368	32	1-1/4	41	1,62	2,5	38	0,77	0,52	130	5,1	120	400
1439057	35	1-3/8	44	1,73	2,5	38	0,83	0,56	140	5,5	120	400
1449478	38	1-1/2	47	1,85	2,5	38	0,89	0,60	150	5,9	120	400
1439065	40	1-37/64	50	1,97	2,5	38	1,01	0,68	160	6,3	120	400
1439073	45	1-49/64	55	2,17	2,5	38	1,15	0,77	170	6,7	120	400
1439081	51	2	61	2,40	2,5	38	1,29	0,87	180	7,1	120	400
1458647	55	2-11/64	65	2,56	2,5	38	1,38	0,93	190	7,5	120	400
1439090	60	2-3/8	70	2,76	2,5	38	1,49	1,00	190	7,5	120	400
1439316	65	2-9/16	75	2,96	2,5	38	1,61	1,08	210	8,3	120	400
1440500	75	2-61/64	85	3,35	2,5	38	1,84	1,24	250	9,9	120	400

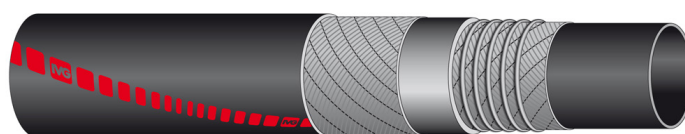

EN

Marine wet exhaust gas hose

Standards: ISO 13363:16 type 2B. SAE J 2006:13 type R2. RINA and Lloyd's approved.

Application: hardwall smooth rubber hose, flexible and lightweight for gas exhaust mixed with water used in pleasure boats of up to 24 m length.

Temperature: -30°C (22°F) to +100°C (+212°F).

Construction

Tube: black, smooth, synthetic rubber compound, gas exhaust resistant.

Reinforcement: high strength synthetic cord plus embedded helix wire.

Cover: black, smooth (wrapped finish), synthetic rubber compound; weather and abrasion resistant.

Branding: red spiral stripe: IVG BOAT AMALFI LL MARINE WET EXHAUST B.P. 2,5 bar 37,5 psi -30°C+100°C -22°F+212°F RINA N° DIP437423CS/002 ISO 13363:16 2B LLOYD'S LR2003044TA SAE J 2006:13 R2 I.D. M/Y.

Also available upon request: 1. Different diameters.

CN

硬壁游艇排气管

质量标准: ISO 13363:16 type 2B. SAE J 2006:13 type R2. RINA 及 Lloyd's 劳氏认证。

应用范围: 硬壁胶管，管子柔韧，轻便，用于24 米游艇排放气体及海 水混合物。

温度范围: -30° C (-22° F) 到 +100° C(+212° F)。

软管结构

内层: 黑色，光滑合成橡胶，耐气体排放。

加强层: 高强度合成线和螺旋钢丝加强。

外层: 黑色，光滑（表面布纹），合成橡胶，耐油，耐气候，耐磨。

商标: 连续红色条纹: IVG BOAT AMALFI LL MARINE WET EXHAUST B.P. 2,5 bar 37,5 psi -30° C+100° C -22° F+212° F RINA N° DIP437423CS/002 ISO 13363:16 2B LLOYD' S LR-2003044TA SAE J 2006:13 R2 I.D. M/Y.

可选择项: 1. 不同口径。