




code	inside diameter		outside diameter		working pressure		burst pressure		weight nominal		length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1476408	19	3/4	27	1,06	3	45	9	135	0,33	0,22	60	200
1478087	25	1	33	1,30	3	45	9	135	0,42	0,28	60	200
1600222	32	1-1/4	40	1,58	3	45	9	135	0,52	0,35	60	200
1700294	38	1-1/2	46	1,81	3	45	9	135	0,61	0,41	60	200
1484141	51	2	59	2,33	3	45	9	135	0,80	0,54	60	200
1600324	63,5	2-1/2	71,5	2,82	3	45	9	135	0,97	0,65	60	200
1600323	76	3	84	3,31	3	45	9	135	1,15	0,77	60	200
1600368	102	4	112	4,41	3	45	9	135	1,86	1,25	60	200

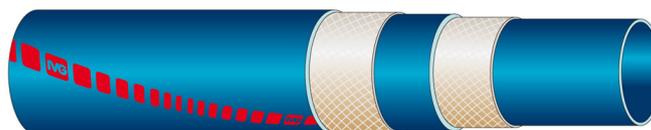

EN

High temperature air and water delivery hose

Standards: SAE J 2006.

Application: softwall silicone hose used to convey fluids such as water mixed with anti-freeze liquids and hot air, with good resistance to mineral oils. Suitable to be used as a flexible connection in nautical engine where cooling systems high temperature resistance is required.

Temperature: from -50°C to +180°C, peaks up to +200°C.

Construction

Tube: blue, smooth, silicone.

Reinforcement: synthetic cord.

Cover: blue, smooth (wrapped finish), silicone.

Branding: continuous red stripe "Boat (family logo) NAVYSIL - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG LOGO)".

Also available upon request: 1. Different diameters. 2. Different colors. 3. Hardwall hose with smooth cover.

CN

软壁发动机散热器硅胶管

质量标准: SAE J 2006.

应用范围: 软壁硅胶管，适用于输送添加了防冻液的水，也可输送热空气，具备良好的耐油性，耐高温，适用于船舶发动机的有耐高温要求的冷却系统。

温度范围: -50° C 到 +180° C，瞬间温度可耐+200° C。

软管结构

内层: 蓝色，光滑，硅橡胶。

加强层: 合成线绳。

外层: 蓝色，光滑（表面布纹），硅橡胶，耐热。

商标: 连续红色条纹“Boat（公司商标）NAVYSIL - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG 商标)”。

可选择项: 1. 不同口径 2. 其它颜色 3. 硬壁光滑外层