


code	inside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft
1600705	19	3/4	3	45	9	135	0,50	0,34	70	2,8	0,9	60	200
1600706	25	1	3	45	9	135	0,66	0,44	90	3,5	0,9	60	200
1600707	32	1-1/4	3	45	9	135	0,81	0,54	110	4,3	0,9	60	200
1600708	38	1-1/2	3	45	9	135	1,02	0,69	130	5,1	0,9	60	200
1600213	51	2	3	45	9	135	1,31	0,88	200	7,9	0,9	60	200
1600709	63,5	2-1/2	3	45	9	135	1,59	1,07	300	11,8	0,9	60	200
1479431	76	3	3	45	9	135	1,99	1,34	350	13,8	0,9	60	200
1700583	90	3-35/64	3	45	9	135	2,32	1,56	450	17,7	0,9	60	200
1700584	102	4	3	45	9	135	2,61	1,75	500	19,7	0,9	12	40
1500538	127	5	1	15	3	45	4,01	2,70	640	25,2	0,9	12	40
1700587	152	6	1	15	3	45	4,74	3,19	800	31,5	0,9	12	40
1700589	203	8	1	15	3	45	7,57	5,09	1100	43,3	0,9	12	40

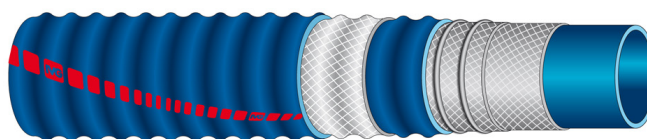

EN

High temperature air, water and wet exhaust suction and delivery hose

Standards: SAE J 2006.

Application: hardwall, corrugated silicone hose used for the suction and delivery of fluids such as water mixed with anti-freeze liquids and hot air, with good resistance to mineral oils. Suitable to be used as a flexible connection in nautical engine cooling systems where a high temperature resistance is required.

Temperature: from -50°C to +180°C, peaks up to +200°C.

Construction

Tube: blue, smooth, silicone.

Reinforcement: synthetic cord plus steel helix wire.

Cover: blue, corrugated, silicone.

Branding: continuous red stripe "Boat (family logo) NAVYSIL LO - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG LOGO)".

Also available upon request: 1. Different diameters 2. Different colors. 3. Hardwall hose with smooth cover.

CN

波纹发动机散热器硅胶管

质量标准: SAE J 2006.

应用范围: 波纹硬壁硅胶管，适用于吸送和排放添加了防冻液的水，也可输送热空气，具备良好的耐油性，耐高温，适用于船舶发动机的有耐高温要求的冷却系统。

温度范围: -50° C 到 +180° C, 瞬间温度可耐+200° C.

软管结构

内层: 蓝色，光滑，硅橡胶。

加强层: 合成绳及螺旋钢丝加强。

外层: 蓝色，波纹状，硅橡胶。

商标: 连续红色条纹 "Boat (公司商标) NAVYSIL LO - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG 商标)"。

可选择项: 1. 不同口径 2. 其它颜色 3. 硬壁光滑外层