




code	inside diameter		working pressure		burst pressure		weight nominal		bending radius		vacuum	length max	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		m	ft
1462440	51	2	3	45	9	135	1,14	0,77	160	6,3	0,9	60	200
1430092	76	3	3	45	9	135	1,71	1,15	230	9,1	0,9	60	200
1469479	80	3-5/32	3	45	9	135	1,98	1,33	240	9,5	0,9	60	200
1430106	102	4	3	45	9	135	2,63	1,77	310	12,2	0,9	60	200
1468723	110	4-21/64	3	45	9	135	2,82	1,90	350	13,8	0,9	60	200
1430114	127	5	3	45	9	135	3,95	2,65	380	15,0	0,9	60	200
1431102	152	6	3	45	9	135	4,49	3,02	460	18,1	0,9	60	200
1451910	203	8	3	45	9	135	9,98	6,70	610	24,0	0,9	60	200
1419528	250	10	3	45	9	135	13,25	8,90	950	37,4	0,9	12	40

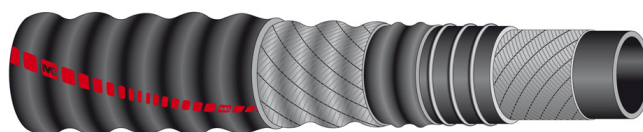

**EN**

## Suction of abrasive materials specially developed for suction excavators

**Application:** hardwall corrugated hose for suction of sand and different kinds of abrasive materials (waste, large rocks, debris, etc.), used in harsh conditions, it is specially developed for suction excavators with mechanical arm. It can also be used for industrial cleanings. Hose suitable for use in an ATEX environment. Tested by the notified body INERIS.

**Temperature:** from -30°C (-22°F) to +70°C (+158°F).

**Construction**

**Tube:** black, smooth anti-static synthetic rubber with excellent resistance to abrasion.

**Reinforcement:** high strength synthetic cord plus embedded steel helix wire.

**Cover:** black, corrugated (wrapped finish) synthetic weathering and abrasion resistant rubber compound.

**Electrical Resistance:** hose grade Ω-CL according to the standard ISO 8031 for lengths equal to or lower than 60 m.

**Branding:** continuous red stripe "IVG Truck (family logo)..."

**Also available upon request:** 1. Supplied in application lengths with soft ends. 2. Different diameters.

**CN**

## 波纹物块吸排管

**应用范围:** 硬壁波纹胶管，用于恶劣环境下，吸送砂砾及不同种类的 磨料（废物，大岩石，碎屑等）；专门设计用于带机械手臂的挖掘机，也可用于工业清洗。管道适用于ATEX环境，经指定机构INERIS测试。

**温度范围:** -30° C (-22° F) 到+70° C (+158° F)

**软管结构**

**内层:** 黑色，光滑，防静电的合成橡胶，具有极好的耐磨性

**加强层:** 高强度合成线及内嵌式螺旋钢丝

**外层:** 黑色，波纹（表面布纹）合成橡胶，耐磨损，耐气候

**电阻性:** 胶管符合ISO 8031标准 Ω-CL等级等于或低于60米的

**商标:** 连续红色商标带 “IVG Truck (公司商标)..."

**可选择项:** 1. 带软壁端口的用户使用长度 2. 不同口径