


# Tallin

## Напорно-всасывающий рукав для гидравлических масел

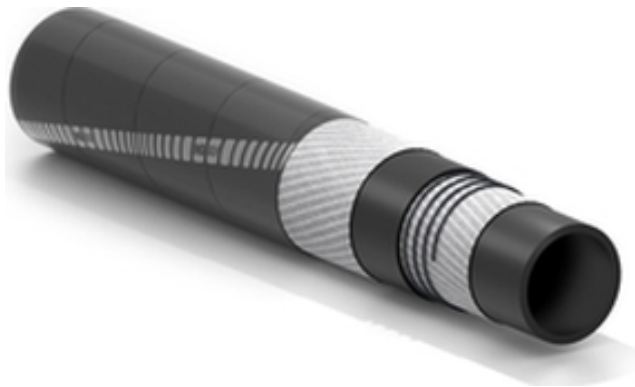

### Нормативно-правовые акты:

SAE J 517, тип SAE 100 R4 для резины.

### Применение:

напорно-всасывающий гладкий рукав, предназначенный для подачи масел в гидравлические системы (за исключением масел на эфирной основе)

резина соответствует SAE J 517, тип SAE 100 R4

Долгосрочность  
для гидравлических систем



### Внутренний слой:

чёрный, гладкий из синтетического каучука, маслбензоустойчив.

### Усиление:

высокопрочный синтетический корд, встроенная стальная спираль.

### Покрытие:

чёрное, гладкое (с отпечатком текстильного бандажа) из синтетического каучука, устойчивое к атмосферным воздействиям.

### Температура:

от -40°C до +100°C.

### Маркировка:

красная маркировочная лента "IVG Oil (логотип сферы применения)...".



# Tallin



Код	Внутренний диаметр		Внешний диаметр		Рабочее давление		Разрывное давление		Номинальный вес		Радиус изгиба		Вакуум	Максимальная длина	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		bar	m
1432559	19	3/4	28	1,10	10	150	30	450	0,51	0,34	95	3,7	0,9	120	400
1430157	25	1	34,5	1,36	10	150	30	450	0,67	0,45	125	4,9	0,9	120	400
1430629	32	1-1/4	41,5	1,64	8	120	24	360	0,83	0,56	160	6,3	0,9	120	400
1452410	38	1-1/2	48	1,89	8	120	24	360	1,02	0,69	185	7,3	0,9	120	400
1419510	40	1-37/64	50	1,97	8	120	24	360	1,07	0,72	195	7,7	0,9	120	400
1418998	45	1-49/64	55	2,17	6	90	18	270	1,19	0,80	198	7,8	0,9	120	400
1419293	51	2	61	2,40	6	90	18	270	1,33	0,89	200	7,9	0,9	120	400
1419676	60	2-3/8	71,5	2,82	5	75	15	225	2,08	1,39	315	12,4	0,9	120	400
1419668	76	3	88	3,47	5	75	15	225	2,88	1,93	380	15,0	0,9	120	400

**Возможные варианты по запросу:**

1. Другие диаметры.

**Рекомендуемые соединения:**



Thread coupling EN 14420-5 (DIN 2817)



Flanges



Giroexp/F

## SPECIAL DETAILS

### SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on [www.ivgspa.it](http://www.ivgspa.it). These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

**For safety reasons, never exceed the working pressure indicated in the product data sheet.**

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department ([marketing@ivgspa.it](mailto:marketing@ivgspa.it)).