


Puertorico

Напорно-всасывающий рукав для топлива и минеральных масел

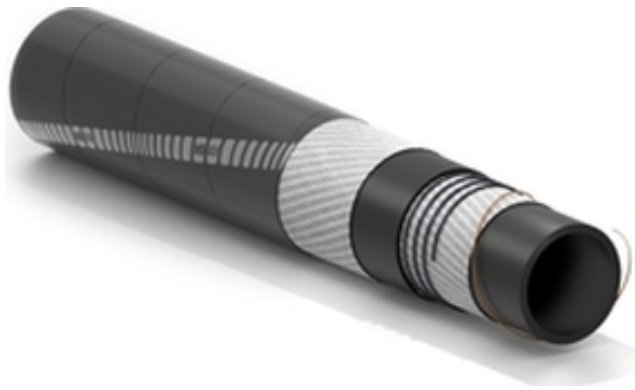

Применение:

напорно-всасывающий гладкий рукав предназначен для подачи и всасывания нефтепродуктов с ароматическим содержанием до 30%.

хорошая устойчивость старению
Гибкий и легкий в использовании
максимальная длина до 120м

Внутренний слой:

чёрный, гладкий из синтетического каучука состава NBR.

Усиление:

высокопрочный синтетический корд, встроенные антистатическая медная стренга и стальная спираль.

Покрытие:

чёрное, гладкое (с отпечатком текстильного биндажа), из синтетического каучука, устойчивое к атмосферным воздействиям и маслам.

Температура:

от -20°C до +70°C.

Маркировка:

жёлтая маркировочная лента "IVG Oil (логотип сферы применения)...".



Puertorico



Код	Внутренний диаметр		Внешний диаметр		Рабочее давление		Разрывное давление		Номинальный вес		Радиус изгиба		Вакуум	Максимальная длина	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		bar	m
1414194	19	3/4	29	1,14	10	150	30	450	0,55	0,37	80	3,2	0,9	120	400
1415115	25	1	35	1,38	10	150	30	450	0,68	0,46	105	4,1	0,9	120	400
1414801	32	1-1/4	42	1,65	10	150	30	450	0,83	0,56	135	5,3	0,9	120	400
1414208	38	1-1/2	49	1,93	10	150	30	450	1,08	0,73	165	6,5	0,9	120	400
1415140	40	1-37/64	51	2,01	10	150	30	450	1,13	0,76	170	6,7	0,9	120	400
1414216	51	2	62	2,44	10	150	30	450	1,49	1,00	230	9,1	0,9	120	400
1414828	63,5	2-1/2	76	2,99	10	150	30	450	2,29	1,54	290	11,4	0,9	120	400
1414836	76	3	89	3,51	10	150	30	450	2,73	1,85	360	14,2	0,9	120	400
1417541	90	3-35/64	105,5	4,16	10	150	30	450	4,02	2,70	450	17,7	0,9	120	400
1415204	102	4	118	4,65	10	150	30	450	4,65	3,13	515	20,3	0,9	120	400

Возможные варианты по запросу:

1. Другие диаметры.
2. Другое рабочее давление.
3. Puertorico Super для нефтепродуктов с ароматическим содержанием до 50%.

Рекомендуемые соединения:



TW EN 14420-6



Fuel Italian Type coupling



Camlock EN 14420-7 (DIN 2828)

SPECIAL DETAILS

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it. These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).