


Don

Dry abrasive materials delivery hose

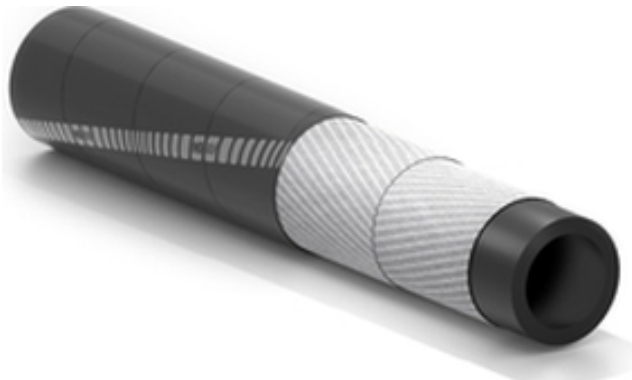

Application:

softwall bulk materials handling hose made with antistatic and abrasion resistant rubber. Suitable to convey cement, sand, gravel, silica, and other dry abrasive materials.

Dry abrasive materials
Antistatic hose
Abrasion resistant

Tube:

black, smooth, NR/SBR rubber with good resistance in handling abrasive materials.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth (wrapped finish), NR/SBR rubber, abrasion resistant.

Temperature:

from -40°C (-40°F) to +70°C (+158°F).

Branding:

continuous red stripe "IVG Truck (family logo)...".



Don



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1055429	76	3	94	3,70	6	90	18	270	2,63	1,76	120	400
1090380	90	3-35/64	106	4,18	6	90	18	270	2,63	1,77	120	400
1056760	102	4	116	4,57	6	90	18	270	2,63	1,77	120	400
1257064	102	4	112	4,41	5	75	15	225	1,75	1,17	120	400
1456032	102	4	120,5	4,75	5	75	15	225	3,45	2,30	120	400
1457411	102	4	122	4,81	5	75	15	225	3,7	2,47	120	400
1463462	102	4	118	4,65	5	75	15	225	2,96	1,97	120	400
1292781	127	5	139	5,48	5	75	15	225	2,77	1,86	120	400

Variants available on request:

1. Different diameters
2. Different working pressures.

Recommended Couplings:



Irriv type CP



Irriv type BR



Camlock

