


Manitoba EN ISO 6134

Steam hose for 165°C

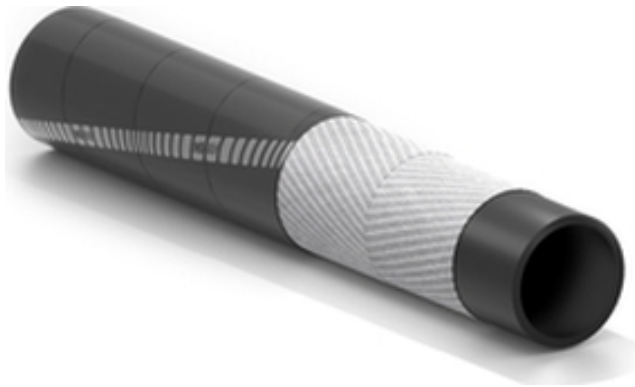

Application:

softwall steam hose, textile reinforced, recommended for use with saturated steam at a maximum working pressure of 6 bar (90 psi).

For steam up to +165°C

According to EN ISO 6134/17 type 1 class A

Length up to 120 m

Specifications:

EN ISO 6134:2017 type 1 class A.



Tube:

black, smooth, EPDM rubber, resistant to saturated steam.

Reinforcement:

high strength synthetic cord.

Cover:


black, smooth (wrapped finish), EPDM rubber, resistant to high temperatures, weathering and ozone.

Temperature:

from -40°C (-40°F) to +165°C (+329°F).

Branding:

continuous embossed marking "IVG – EN ISO 6134:2017 - 1A - STEAM - 6 bar - 165°C - I.D. - M - quarter and year of manufacture.



Manitoba EN ISO 6134



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1421832	10	25/64	21,5	0,85	6	90	60	900	0,31	0,21	120	400
1421859	13	1/2	25	0,99	6	90	60	900	0,37	0,25	120	400
1421840	16	5/8	30	1,18	6	90	60	900	0,55	0,37	120	400
1430130	19	3/4	33	1,30	6	90	60	900	0,62	0,42	120	400
1431366	25	1	40	1,58	6	90	60	900	0,77	0,52	120	400

Variants available on request:

1. Different diameters
2. Cover in different colours.

Recommended Couplings:



Steam coupling with clamp

