


# Supertop UPE



Delivery of chemicals, solvents and food, PE-UHMW tube

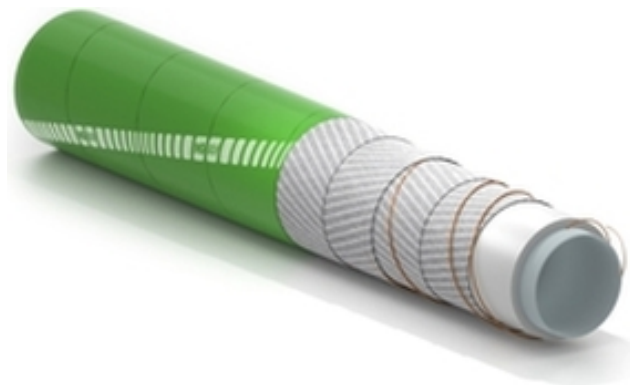

**Application:**

softwall hose suitable for handling a wide range of aggressive chemicals, solvents, alcohols and food. Normally installed on tank trucks and discharge platforms in chemical, oil and food industries.

Complies with EN 12115

The smooth tube makes cleaning easier

Compliant with food regulations

**Specifications:**

BfR III. EN 12115:2021. FDA tit. 21 it. 177.1520 for foods. Tube: Reg. EC 1935/2004. Tube: Reg. EC 2023/2006. Reg. EU 10/2011 aqueous and fatty foods. Phthalates free (REACH Reg.). PAHs free (acc. to ZEK 01.4-08 Cat. 1).



**Tube:**

white, food quality, smooth, high weight polyethylene (PE-UHMW). Chemical resistance according to IVG chemical resistance chart. For temperature exceeding 50°C contact IVG.

**Reinforcement:**

high strength synthetic cord and antistatic copper wire.

**Cover:**

green, smooth (wrapped finish), EPDM rubber resistant to chemicals, abrasion, weathering and ozone.

**Temperature:**

-40°C (-40°F) +100°C (+212°F) depending on medium.

**Electrical resistance:**

type M.

**Branding:**

continuous blue/white stripe “IVG Chem...”. Embossed branding “IVG Chem SUPERTOP-UPE EN 12115...”.



# Supertop UPE



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1407317	19	3/4	31	1,22	16	240	64	960	0,51	0,36	60	200
1399276	25	1	37	1,46	16	240	64	960	0,63	0,44	60	200
1475231	32	1-1/4	45	1,77	16	240	64	960	0,82	0,57	60	200
1472305	38	1-1/2	52	2,05	16	240	64	960	1,05	0,73	60	200
1300067	40	2-1/2	54	3,11	16	240	64	960	1,7	1,28	60	200
1407198	51	2	67	2,64	16	240	64	960	1,55	1,08	60	200
1484389	76	3	92	3,63	16	240	64	960	2,15	1,53	60	200
1483080	102	4	118	4,65	16	240	64	960	2,84	1,97	60	200

**Variants available on request:**

- 1. With black conductive cover (Ω version).

**Recommended Couplings:**



Camlock



Thread coupling EN 14420-5 (DIN 2817)



Clamp

## SPECIAL DETAILS

### CIP and advice to users on hoses in contact with food

#### Sanitation

- IVG recommends for the first use a wash cycle with potable water at a maximum temperature of 80°C/90°C and a hose sanitation as reported above before conveying food products.
- At the end of each cycle the equipment and hose assemblies must be cleaned and disinfected.
- Strictly follow the times indicated for each cleaning cycle.
- Do not immerse hose assembly in the sanitation fluid because only the inner tube is suitable for contact with the below mentioned solvents.
- Every cleaning cycle must be immediately followed by a complete rinse.
- Do not exceed 3 bar working pressure in CIP systems.

HOSE*	Hot Water	Steam open end	H2O2 1%	H2O2 3%	Peracetic Acid 0.1%	Peracetic Acid 0.5%	Phosphoric Acid 5%	Chlorine 1%	NaOH 2%	NaOH 5%	Nitric Acid 0.1%	Nitric Acid 3%
FOOD SCOTLAND FOOD VINO FLEX FOOD CANA FOOD TUSCANY FOOD PIEDMONT FOOD CALIFORNIA TRUCK FOOD FLEX/IIIR	90°C 8 hours	Max 130°C 30 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes	Max 50°C 15 minutes	Max 30°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 30°C 15 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes
FOOD MILLENNIUM FOOD DIJON FOOD DAMASCO	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
TRUCK FOOD FLEX FOOD MERLOT FOOD PARRY	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
FOOD ALICANTE FOOD MILKSERVICE	90°C 8 hours	Max 130°C 30 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes	Max 50°C 15 minutes	Max 30°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 80°C 15 minutes	Max 30°C 15 minutes	Max 70°C 15 minutes	Max 30°C 15 minutes
FOOD PANAMA FOOD ACAPULCO FOOD OILMILL	80°C 8 hours	Max 110°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 70°C 10 minutes	Max 70°C 10 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes
FOOD ACQUABLU	80°C 8 hours	Max 110°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 70°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes
FOOD SHETLAND CHEM THUNDER FLEX CHEM SUPERTOP UPE	90°C 12 hours	Max 130°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 70°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes	Max 80°C 30 minutes	Max 50°C 30 minutes
TRUCK DON/BN TRUCK GORDON	80°C 8 hours	Max 110°C 15 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 30°C 10 minutes	Max 50°C 15 minutes	Max 70°C 15 minutes	Max 70°C 15 minutes	Max 30°C 10 minutes	Max 50°C 10 minutes	Max 30°C 10 minutes

\*The indications regarding hoses on this list refer to the product code found in the IVG catalogue [www.ivgspa.it](http://www.ivgspa.it).

#### General advice

- Hoses are not meant to permanently contain the products they convey.
- Store hoses away from direct sunlight and heat. When not in use store hoses with perforated plugs at both ends.
- Before every use check the hose condition. The hose cover, especially in the fitting area, should show no signs of cuts, tears, or bubbles. There should be no hard or weak areas, signs of detachment or collapse.
- Remember to guarantee traceability of every single piece of hose put into the market (Reg. EC 1935/2004, EC 2023/2006).



## SPECIAL DETAILS

### SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on [www.ivgspa.it](http://www.ivgspa.it). These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

**For safety reasons, never exceed the working pressure indicated in the product data sheet.**

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department ([marketing@ivgspa.it](mailto:marketing@ivgspa.it)).