


Chicago BS 3169

Booster hose for fire fighting fluids

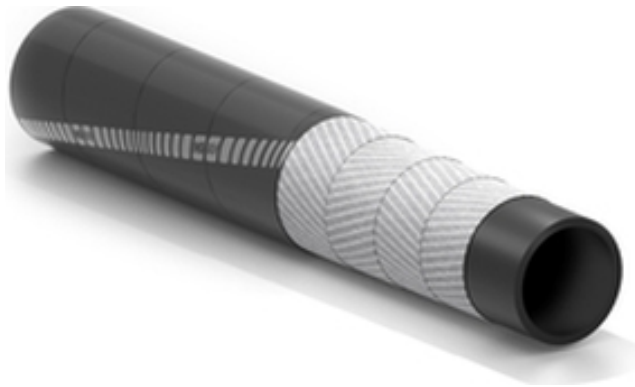

Application:

a robust and flexible softwall reel booster hose as fitted on fire fighting trucks, for the delivery of water and extinguishing fluids.

Robust and flexible
Long lifespan
Length up to 120 m

Specifications:

BS 3169:1986 class A, Type 2.



Tube:

black, smooth, SBR rubber, resistant to chemical products and fire extinguishing foams.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth, (wrapped finish) EPDM rubber, weathering and abrasion resistant.

Temperature:

from -40°C (-40°F) to +70°C (+158°F).

Branding:

continuous embossed marking "IVG/BS 3169:1986 A2/I.D./month and year of manufacture/40 bar".



Chicago BS 3169



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Min. Reel size		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	m	ft
1400320	19	3/4	32,5	1,28	40	600	120	1800	0,64	0,43	150	5,9	120	400
1408216	25	1	38,5	1,52	40	600	120	1800	0,78	0,53	150	5,9	120	400

Variants available on request:

1. Different diameters.

