


Navysil LO

Напорно-всасывающий рукав для воздуха и воды горячих температур и выхлопных газов

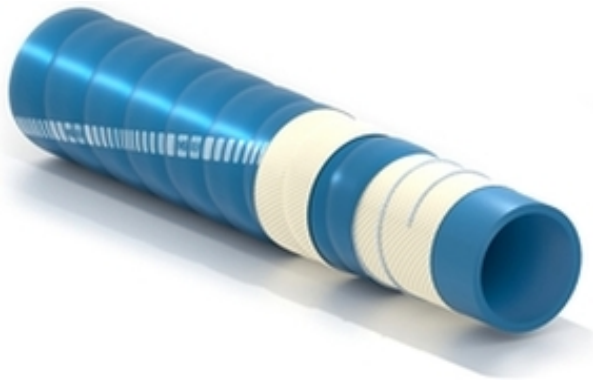

Нормативно-правовые акты:
SAE J 2006.

Применение:

гофрированный напорно-всасывающий силиконовый рукав для подачи воды, охлаждающих жидкостей и горячего воздуха, особо устойчив к минеральным маслам. Предназначен для использования в качестве гибких соединений в системах охлаждения судовых двигателей, при очень высоких температурах.

пригоден для высоких температур
Отличный радиус изгиба
версия из силикона



Внутренний слой:
синий, гладкий, силиконовый.

Усиление:
текстильный корд, встроенная стальная спираль.

Покрытие:
синее, гофрированное, силикона.

Температура:
от -50 до +180°C в отдельных случаях до 200°C.

Маркировка:
красная маркировочная лента "Boat (логотип сферы применения) NAVYSIL LO - SAE J 2006 - W.P. 3 bar 45 psi S.F. 3:1 (IVG LOGO)".



Navysil LO



Код	Внутренний диаметр		Рабочее давление		Разрывное давление		Номинальный вес		Радиус изгиба		Вакуум	Максимальная длина	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		bar	m
1600705	19	3/4	3	45	9	135	0,5	0,34	70	2,8	0,9	60	200
1600706	25	1	3	45	9	135	0,67	0,44	90	3,5	0,9	60	200
1600707	32	1-1/4	3	45	9	135	0,81	0,54	110	4,3	0,9	60	200
1600708	38	1-1/2	3	45	9	135	1,02	0,69	130	5,1	0,9	60	200
1600213	51	2	3	45	9	135	1,31	0,88	200	7,9	0,9	60	200
1600709	63,5	2-1/2	3	45	9	135	1,59	1,07	300	11,8	0,9	60	200
1700042	76	3	3	45	9	135	1,99	1,34	350	13,8	0,9	60	200
1700583	90	3-35/64	3	45	9	135	2,33	1,56	450	17,7	0,9	60	200
1700584	102	4	3	45	9	135	2,61	1,75	500	19,7	0,9	12	40
1700586	127	5	1	15	3	45	4,01	2,70	640	25,2	0,9	12	40
1700587	152	6	1	15	3	45	4,74	3,19	800	31,5	0,9	12	40
1700589	203	8	1	15	3	45	7,58	5,09	1100	43,3	0,9	12	40

Возможные варианты по запросу:

1. Другие диаметры
2. Другие цвета
3. Версия гладкий со спиралью

SPECIAL DETAILS

SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on www.ivgspa.it. These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

For safety reasons, never exceed the working pressure indicated in the product data sheet.

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department (marketing@ivgspa.it).