


Boatex

Water and wet exhaust delivery hose

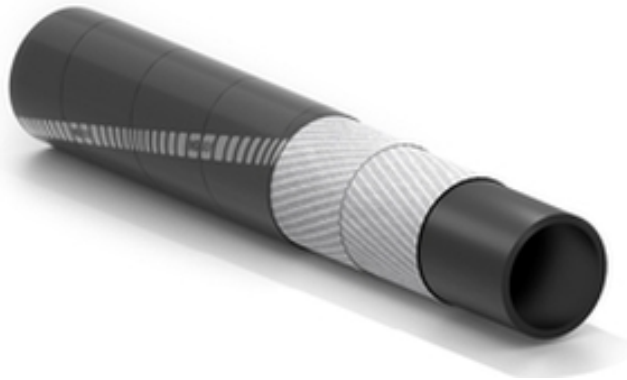

Specifications:

SAE J 2006 type R1.

Application:

softwall hose used to convey water, in cooling engine systems and for wet exhaust.

Long lifespan

Wide range of diameters

Temperature from -30°C to +80°C



Tube:

black, smooth, synthetic rubber.

Reinforcement:

high strength synthetic cord.

Cover:

black, smooth (wrapped finish), synthetic rubber, weathering resistant.

Temperature:

from -30°C (-22°F) to +80°C (+176°F).



Boatex



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1193384	16	5/8	25	0,99	3	45	9	135	0,36	0,25	120	400
1156209	19	3/4	28	1,10	3	45	9	135	0,42	0,28	120	400
1185810	25	1	35	1,38	3	45	9	135	0,62	0,42	120	400
1172271	32	1-1/4	43	1,69	3	45	9	135	0,86	0,58	120	400
1168070	38	1-1/2	49	1,93	3	45	9	135	0,99	0,67	120	400
1170619	51	2	63,5	2,50	3	45	9	135	1,49	1,01	120	400
1168150	63,5	2-1/2	77,5	3,05	3	45	9	135	2,03	1,37	120	400
1156950	76	3	90	3,55	3	45	9	135	2,39	1,62	120	400
1168169	90	3-35/64	104	4,10	3	45	9	135	2,79	1,89	120	400
1168126	102	4	116	4,57	3	45	9	135	3,13	2,12	120	400
1170651	127	5	143	5,63	3	45	9	135	4,17	2,81	120	400
1172280	152	6	170	6,70	3	45	9	135	5,87	3,97	120	400

