


# Australia EN 1360:13

## Fuel and oil delivery hose

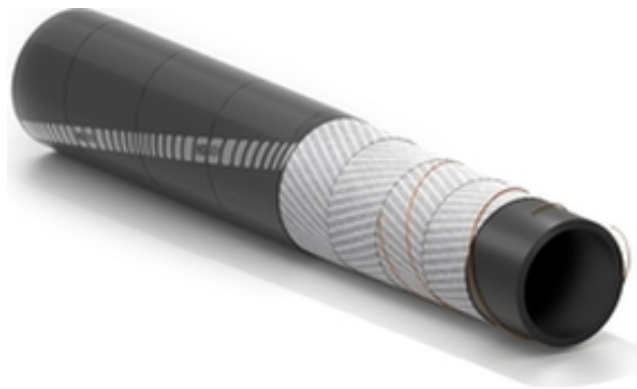

**Specifications:**  
EN 1360:2013 type 1, M grade.

**Application:**

softwall hose used for the delivery of petroleum products such as diesel, gasoline with aromatic content up to 50%. Also used in support of refueling pumps.

Aromatic content up to 50%  
Length up to 120 m  
Also for refueling pumps



**Tube:**  
black, smooth synthetic rubber.


**Reinforcement:**  
high strength synthetic cord plus antistatic copper wires.

**Cover:**  
black, smooth (wrapped finish), synthetic rubber, weathering and oil resistant.

**Temperature:**  
from -30°C (-22°F) to +55°C (+131°F).

**Electrical resistance:**  
 $R < 1 \times 10^2 \Omega$ /application lengths, ensured by connecting the copper wires to the couplings.

**Branding:**  
continuous yellow stripe "IVG (family logo)...".



# Australia EN 1360:13



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	m	ft
1464370	16	5/8	28	1,10	16	240	48	720	0,54	0,37	120	400
1464361	19	3/4	31	1,22	16	240	48	720	0,62	0,42	120	400
1453114	25	1	37	1,46	16	240	48	720	0,76	0,52	120	400

**Variants available on request:**

1. Different diameters.
2. Australia Reel hose.

**Recommended Couplings:**



Camlock EN 14420-7 (DIN 2828)



Thread coupling EN 14420-5 (DIN 2817)



Safety clamps EN 14420-3 (DIN 2817)

