


Toronto

Water suction and discharge hose

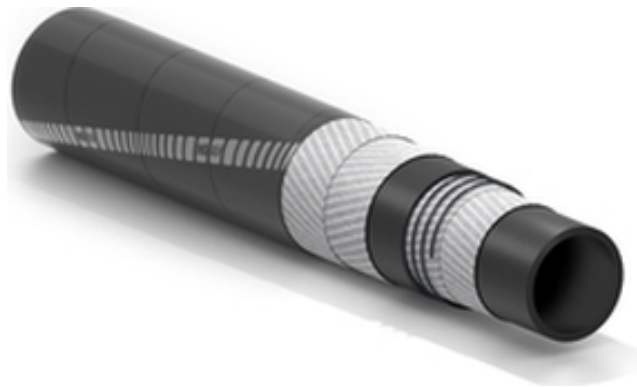

Application:

hardwall hose for suction and discharge of water and non corrosive fluids. Suitable for agricultural, industrial and other applications.

The best seller for water suction and delivery
Weathering and ozone resistant
Wide range of diameters available in stock

Tube:

black, smooth, synthetic rubber.

Reinforcement:

high strength synthetic cord and helix wire.

Cover:

black, smooth, (wrapped finish) synthetic rubber, weathering and ozone resistant.

Temperature:

from -30°C (-22°F) to +70°C (+158°F).

Branding:

continuous green stripe "IVG Water (family logo)..."



Toronto



Code	Inside diameter		Outside diameter		Working pressure		Burst pressure		Weight nominal		Bending radius		Vacuum		Length max	
	mm	inch	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch	bar	m	ft	
1403745	25	1	33	1,30	10	150	30	450	0,57	0,39	125	4,9	0,9	120	400	
1402102	30	1-3/16	38	1,50	10	150	30	450	0,67	0,45	150	5,9	0,9	120	400	
1403648	32	1-1/4	40	1,58	10	150	30	450	0,73	0,49	160	6,3	0,9	120	400	
1402110	38	1-1/2	47,5	1,87	10	150	30	450	0,92	0,62	190	7,5	0,9	120	400	
1403079	40	1-37/64	49,5	1,95	10	150	30	450	0,96	0,65	200	7,9	0,9	120	400	
1400614	51	2	60,5	2,38	10	150	30	450	1,24	0,83	255	10,0	0,9	120	400	
1402153	63,5	2-1/2	75	2,96	10	150	30	450	2,06	1,38	380	15,0	0,9	120	400	
1400495	76	3	87	3,43	10	150	30	450	2,36	1,59	455	17,9	0,9	120	400	
1401688	80	3-5/32	91	3,59	10	150	30	450	2,56	1,72	480	18,9	0,9	120	400	
1401343	90	3-35/64	102	4,02	10	150	30	450	3,22	2,16	540	21,3	0,9	120	400	
1400525	102	4	114	4,49	10	150	30	450	3,62	2,43	610	24,0	0,9	120	400	
1403664	120	4-23/32	136	5,36	10	150	30	450	4,95	3,33	660	26,0	0,9	60	200	
1402552	127	5	143	5,63	10	150	30	450	5,11	3,43	700	27,6	0,9	60	200	
1401386	152	6	170,5	6,72	10	150	30	450	7,22	4,85	1000	39,4	0,9	60	200	
1406370	203	8	225	8,87	10	150	30	450	12,00	8,06	1400	55,2	0,9	60	200	

Variants available on request:

- 1.Toronto/reel: suitable to be rolled up on reel.
- 2.Different diameters.
- 3.Cover in different colours.

Recommended Couplings:



Camlock



Storz



Flanges

