


# Oilmill Easy



## Напорно-всасывающий рукав для растительных масел. Система EASYSHELL

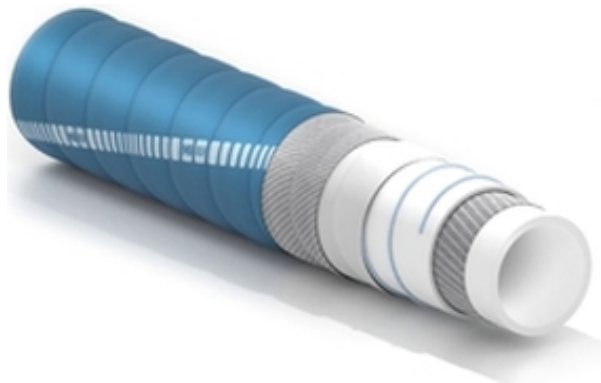

### Нормативно-правовые акты:

Без бисфенола А. D.M.21/03/73 пищевых жирных. FDA параграф 21, пункт 177.2600 для жирных. Не содержит фталатов (REACHReg.). Reg. EC 1935/2004. Reg. EC 2023/2006.

### Применение:

напорно-всасывающий рукав с гофрированной поверхностью, легкий и гибкий, для подачи растительных масел и других жирных пищевых продуктов. Обработка: 15 минут паром до +110°C, 15 минут 1% перексусной кислотой до +50°C, 2% ортофосфорной кислотой, 5% каустической содой.

единственный для пищевых масел безопасен для оливкового масла система EasyShell



### Внутренний слой:

белый, гладкий, из синтетического каучука пищевого качества. Не содержит фталатов.

### Усиление:

Высокопрочный синтетический корд, встроенная стальная спираль.

### Покрытие:


голубое (с отпечатком текстильного банджа), из маслостойкого синтетического каучука, устойчивое к атмосферным воздействиям.

### Температура:

от -25°C до +100°C.

### Маркировка:

желто-зеленая маркировочная лента "IVG Food (логотип сферы применения)...".



# Oilmill Easy



Код	Внутренний диаметр		Рабочее давление		Разрывное давление		Номинальный вес		Радиус изгиба		Вакуум	Максимальная длина	
	mm	inch	bar	psi	bar	psi	kg/m	lbs/ft	mm	inch		bar	m
1462288	25	1	10	150	30	450	0,69	0,46	75	3,0	0,9	60	200
1464396	32	1-1/4	10	150	30	450	0,89	0,60	95	3,7	0,9	60	200
1462296	38	1-1/2	10	150	30	450	1,17	0,78	115	4,5	0,9	60	200
1457233	40	1-37/64	10	150	30	450	1,22	0,82	120	4,7	0,9	60	200
1457250	50	1-31/32	10	150	30	450	1,49	1,00	150	5,9	0,9	60	200
1457241	60	2-3/8	10	150	30	450	1,75	1,17	180	7,1	0,9	60	200
1467409	63,5	2-1/2	10	150	30	450	1,84	1,24	195	7,7	0,9	60	200
1462300	76	3	10	150	30	450	2,28	1,53	225	8,9	0,9	60	200
1456717	80	3-5/32	10	150	30	450	2,38	1,60	240	9,5	0,9	60	200
1453688	100	34-15/16	10	150	30	450	2,98	2,00	360	14,2	0,9	60	200

### Рекомендуемые соединения:



EasyShell clamps



Food coupling SMS 1145



Food coupling DIN 11851

## SPECIAL DETAILS

### SAFETY INFORMATION – USER RESPONSIBILITIES

The service life of rubber hoses mainly depends on the dedicated use. Equipment and systems where the hose is installed must be designed safely. Since our hose can be designed for different applications, **IVG Colbachini** cannot guarantee the proper functioning of the product for all situations.

The analysis of the technical aspects related to specific uses must be performed by the users when choosing the product that meets their requirements. So, in relation to the variety of operating conditions and applications of the IVG hose, the user is solely responsible for the final choice of the product deemed suitable to satisfy the performance and safety requirements called for the application.

The information and technical data shown in the product data sheets must be examined by users with appropriate technical skills. IVG Colbachini is not responsible for other uses, identified by the end user, that are different from the one shown in its catalogues, product sheets, offers, order confirmations and any recommendations attached.

An inappropriate choice of the product or a failure to follow the procedures of installation, use, maintenance and storage of the hoses may lead to a hose break and cause material damage and/or serious injury to people.

For the selection and proper use of the IVG products you can also refer to the document "Recommendations for selection, storage, use and maintenance of rubber hoses" provided by Assogomma and available on [www.ivgspa.it](http://www.ivgspa.it). These recommendations are according to the international standard ISO 8331, "Plastic and rubber hoses and hose assemblies - Guidelines for selection, storage, use and maintenance."

**For safety reasons, never exceed the working pressure indicated in the product data sheet.**

For specific applications of rubber hoses, please refer to the legal requirements or specific standards; moreover, additional recommendations for particularly critical applications are available.

For further information, contact the Marketing department ([marketing@ivgspa.it](mailto:marketing@ivgspa.it)).